

300mm Semi-Automatic BG Tape Laminator

RAD-3500m/12



Facility

Power Supply	Voltage	: AC200-230V (±10%)
	Frequency	: 50/60Hz
	Phase	: single phase
Air Supply	Capacity	: 0.7KVA
	Air pressure	: 0.5-0.8MPa
	Air consumption	: <130L/min (ANR)

Applicable Wafer Size 150mm, 200mm, 300mm

Size
Width : 830mm
Depth : 1,042mm
Height : 1,350mm

Weight 250kg

Processing Capacity 40sec/wafer (excludes setting time)


Outline

- Semi-automatic BG Tape laminator.
- Once the operator supplies the wafer, back grinding tape lamination and tape cutting around the wafer periphery are performed.
- As an option, a heater function maybe added to tables and press rollers.


Suitable Tapes ·BG Tape : Adwill E series, P series

External View


Unit:mm

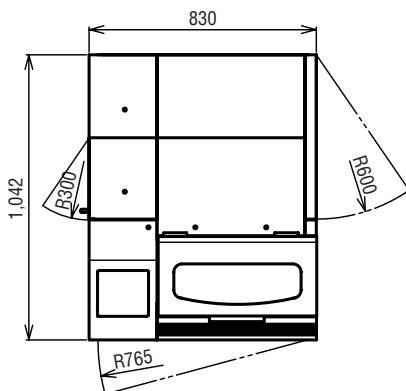

Top View

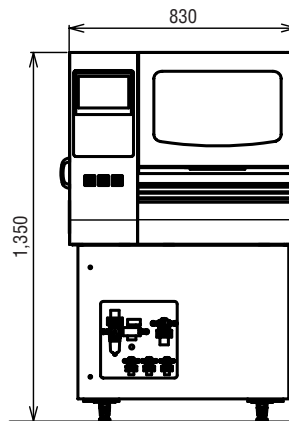

Front View

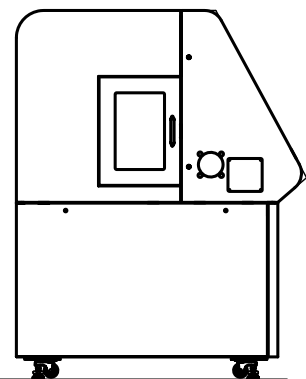

Left Side View



LINTEC Corporation *Linking your dreams*

●Head Office:23-23 Honcho, Itabashi-ku, Tokyo 173-0001, Japan

Contact:Advanced Materials Operations Kowa Iidabashi Bldg., 2-1-2 Koraku, Bunkyo-ku, Tokyo 112-0004, Japan
TEL. +81-3-3868-7737 FAX. +81-3-3868-7726
E-mail:adwill@lintec.co.jp

<http://www.lintec.co.jp/>